

DESCRIPTION

Pure acrylic paint, having good opacity and coverage. Formulated to enhance water repellency, water-vapour permeability and antilock characteristics. And high dose of bactericide to achieve very good resistance to fungus and algae. POLYFLON is destined for use in humid regions and regions submitted to dust. POLYFLON can easily be cleaned by medium pressure water. Available In white and colors as per POLYMATCH SYSTEM.


USAGE

Recommended for exterior use in humid and dusty regions.

APPLICATION

Apply two coats by roller or brush onto clean, dry and sealed surface.

MIXING RATIO *(Dilute with water)*

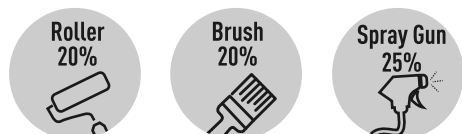

TECHNICAL DATA

| | |
|-------------------|------------------------|
| Specific Gravity | ~ 1.30 |
| Opacity 120 µ wet | ~ 96% |
| Volume Solids | ~37% |
| Finish | Semi-Gloss |
| Coverage | ~ 12 m ² /L |
| Packing | 1 L, 5 L, 20 L |

CLEANING

Use water; however do not throw away in waterway.

SURFACE PREPARATIONS

- For concrete and plaster, wash surface with water under high pressure, let dry, then apply one thin coat of WALL PRIMER (<50 µm).
- If the old coating and/or its substrate have blisters or other defects, then old coating removal must be done by mechanical means or by stripping with Paint Remover. On powder old coatings, apply 1 coat CLEAR BINDER.

If substrate shows presence of fungi or algae, please proceed with the following surface preparations:

- Apply FUNGICIDAL WASH by roller and leave to react for 12h minimum. Rinse with high pressure water again. Brush if necessary. Once dried, apply a coat of fungicidal treatment on the surface which will be coated the same day. Apply a thin coat of CLEAR BINDER where necessary and leave to dry for 3h minimum. Apply 2 coats of POLYFLON paint, leaving each coat to dry 3h minimum.

DRYING TIME

Approximately 1h to touch dry, can be over-coated after approximately 4h. Do not recoat after 36 h.

STORAGE

Tightly closed container should be kept in a cool, dry place. Sealed product can be stored for over 2 year.

SAFETY

- Ensure good ventilation during application and drying. Avoid eating, drinking and smoking while painting.
- In case of insufficient ventilation, wear suitable respiratory equipment.
- In case of contact with eyes, wash with ample water and seek medical advice if necessary.
- Keep out of reach of children.
- Do not use empty containers to store food.
- Do not throw away in waterway.

DISCLAIMER

These recommendations are meant as a guide, no guarantee is implied since conditions of use, method of application and cleanliness of the substrate prior to painting are beyond our control.